

POA-A1HDCI

10 ch Power Amplifier

DENON



THX Ultra2, Reference 150 Watts x 10 channel Fully Configurable Power Amplifier



Bullet points

150W Mono Block Construction Amplifiers

- Fully separated construction for each 10 channels for all same audio quality
- Mono block concept to amplify with best performance
- New amplifier circuit that shortens audio signal paths for the best audio
- Direct Mechanical Ground to minimize mechanical vibration from transformer and radiators
- 150W x 10 channels (8ohms), 300W (4ohms)
- 300W Bridgeable drive (8ohms), 500W (4 ohms)
- THX Ultra2 certified
- 4 ohms guaranteed



High Current and Separated Power Supply

- 8 individual transformers to supply power to each discrete circuit
- 4 main power transformers to drive 10 ch power amplifiers with separated coil winding for pure audio playback
- High current diodes and capacitors to drive bridged speakers



Other Features

- RCA and XLR input for each channel
- VU meters available of any channel
- Gold plated wide pitch speaker terminal
- Bi-Amp / Bridge mode select
- Trigger input
- RS-232C

Denon Matching AV Control Center

- Link control with AVP-A1HDCI




Input / Output terminals

IN	Audio in (RCA)	10
	Audio in (XLR)	10
OUT	Speaker A L/R out	10
	Speaker B L/R out	10
others	Link Control in/out	1 / 1
	RS232C	1
	Trigger in	1

Specifications

Power Amplifier Section	
Rated output	150 W (8 ohms) x 10 ch 300 W (4 ohms) x 10 ch 500 W (4 ohms, bridge)
General	
Power supply	AC 120 V, 60 Hz
Power consumption	12 A (Standby : 0.3W)
Dimensions (WxHxD)	434 x 530 x 281 mm 17-3/32" x 11-1/16" x 20-58/64"
Weight	60 kg, 132 lbs

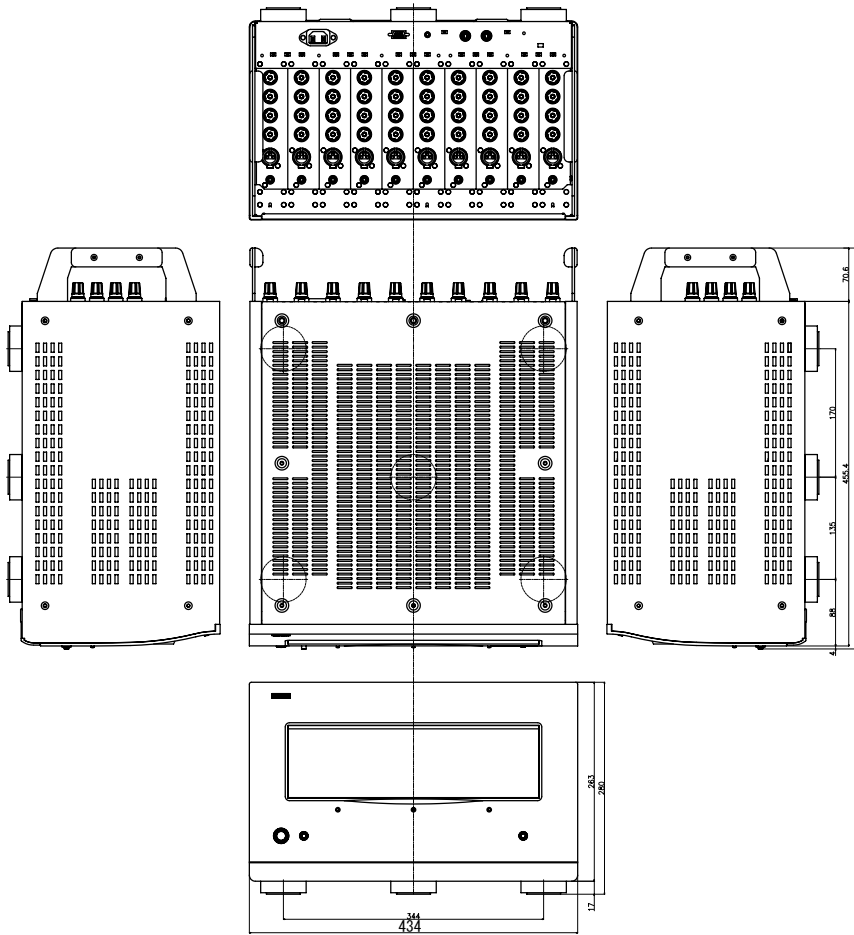

*Design and specifications are subject to change without notice.
*THX is a trademark of THX Ltd. THX may be registered in some jurisdiction. All rights reserved.